

# Curbs Plus, Inc.

1200 Carline Road  
 Rossville, GA. 30741  
 PH (706) 858-1188 / FAX (706) 866-2339

APPROVED BY: \_\_\_\_\_

DATE APPROVED: \_\_\_\_\_

## CPT-2 (Large to Small) Transition-Curb System

### STANDARD FEATURES

1. 14 Ga. Galvanized Steel Construction.
2. Fully Welded Watertight Construction.
3. Welds Coated after Fabrication.
4. 1" Thick Neoprene Faced Fiberglass Insulation.
5. Closure Angles.
6. Load Distributing Internal Reinforcement (As Required).
7. Duct Supports & Gasketing (When Required).

### OPTIONS:


- 1.
- 2.
- 3.
- 4.

PROJECT NAME: \_\_\_\_\_

CITY, STATE: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_


JOB NUMBER: \_\_\_\_\_

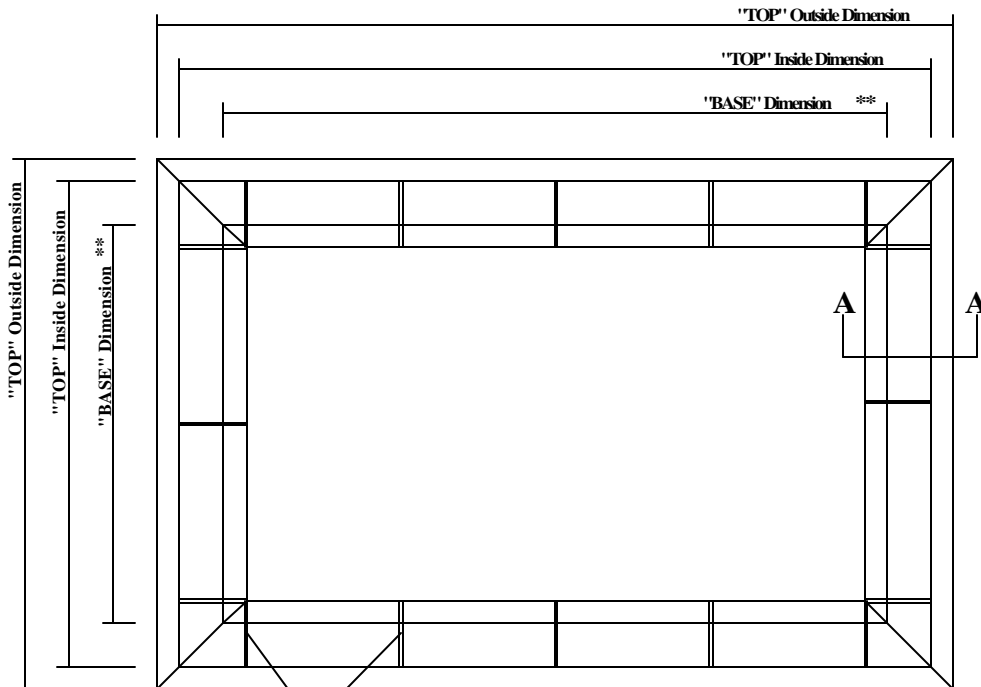

Internal Reinforcing  
(As Required)

PLAN VIEW


Internal Reinforcing  
(As Required)

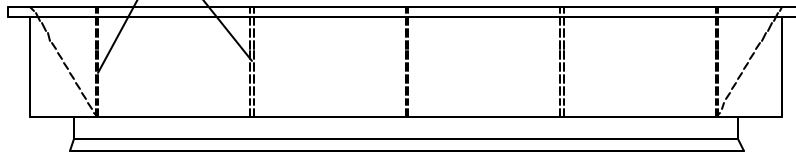

ELEVATION

### Note:

\*\* (1) Base Dimension = Curb O.D. plus 1-1/2" on all "Insulated" Conventional Roof Curbs (CPC-1, 2, 3) and, 1/2" on all Metal Building Roof Curbs, and "Non-Insulated" Conventional Roof Curbs (CPC-4, 5).

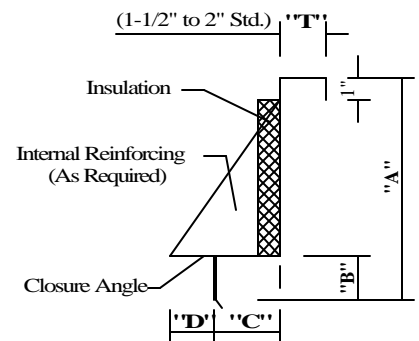

SECTION A-A

QTY.	"BASE" DIM.	"TOP" INSIDE DIM.	"TOP" OUTSIDE DIM.	"T"	"A"	"B"	"C"	"D"	TAG
	X	X	X						